

3: Practical activity #1

Foamboard glider construction and flights

Estimated Duration: 3 hrs



Abstract

In this lab, we will be constructing gliders out of foamboard. A glider is an aircraft that has a large wingspan intended for maximizing lift over drag. This is a key performance factor of flight endurance. Gliders are generally unpowered, meaning that a glider must rely on momentum and gravity to produce its forward velocity, and in turn, its lift. The gliders made today will be hand-launched and will serve as good models for defining and identifying all of the principle forces that act on an aircraft.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

Key Vocabulary and Acronyms

LE - Leading Edge

CG - Center of Gravity

CP - Center of Pressure

CNC - Computer Numerical Control (Usually refers to manufacturing machines such as lathes and mills, depending on the parts)

Horizontal/Vertical Stabilizer - The parts of the tail that do not move relative to the aircraft

Empennage - Tail assembly. Includes both horizontal and vertical stabilizers, rudder, and elevator

Aspect Ratio - Defined as the square of the wingspan divided by the wing area, this unitless parameter is a good indication of a wing's aerodynamic efficiency.

Lift – One of the four principle forces that act on an aircraft, responsible for keeping the aircraft off of the ground.

Drag – Another of the four principle forces, acts in the reverse direction of the plane's motion.

Thrust – The third of the four principle forces, is created by the engines and propels the aircraft forward.

Weight – The final and most common principle force, created by the force of gravity acting on the aircraft.

Equipment Needed

This lab has been designed to use as many common household items as possible to ensure everyone has equal opportunity to build this aircraft. However, these are by far not the only materials you could use to do this project, so while the items listed below may be the most commonly found, feel free to substitute them for whatever other equipment you would be able to use instead. NOTE: This glider lab has been written specifically for a foamboard design, if you are using cardboard or paperboard, please refer to the other glider build manuals.

Items:

- Foamboard
- Scissors/Box Cutter
- Ruler/Tape Measurer
- Pencil
- Wood/White Glue
- Packing Tape

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

Material Notes

When using foamboard, you will not have to worry about grain direction such as with cardboard, but you do have a different issue. Since this material is stiffer than cardboard you will need to remove both the top and bottom layer of paper off the posterboard in order to get a proper bend in your control surfaces. Removing the paper makes your posterboard much more pliable than with both sheets still on. In order to create the deflections in control surfaces for your aircraft, you'll be bending the foamboard very gently against the side of a table. Please see Figure 1 for a visual representation of this process.



Figure 1 - A posterboard control surface molded to better fit in the wing





If this note did not make sense to you, do not worry. This is something that needed to be explained beforehand, but will likely make much more sense to you as you begin to work through this lab. As always, however, if anything is still unclear, do not hesitate to post your questions on the Moodle page, reach out to an instructor, or visit either one of our office hour slots.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

Cutting Techniques

Before beginning to cut out the pieces of your gliders, however, it's recommended that you practice some of the techniques outlined below as they will help ensure that you don't break your foamboard in the construction of your glider. Using any spare foamboard that you may have, carefully practice the below techniques until you feel comfortable enough to move on to your glider.

Table 1 - Cutting techniques for glider construction

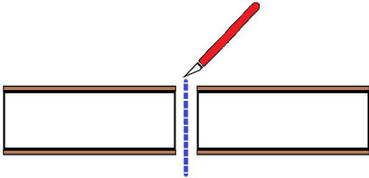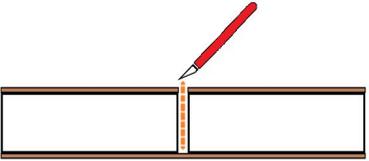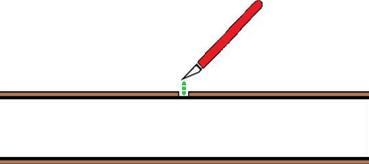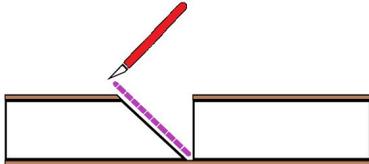Color Code	Description	Diagram
BLUE	100% cut - Fully cut through both the foam and the paper skins.	
ORANGE	90% cut - Cut through the top layer of paper and the foam. Do NOT cut the bottom paper layer. If you do not cut all the way through the foam you can bend the sides and the foam will split nicely, leaving the bottom layer of paper.	
GREEN	10% cut - Only cut the top layer of paper, allowing you to peel the paper in future steps.	
PURPLE	45° cut - Must first have a 90% cut. Afterwards, fold foam away from cut until both pieces linked by remaining paper are parallel to each other. Cut away about 45° off the edge of the foam. You may need to do this on one or both sides, depending on where purple cuts are indicated in the diagrams.	

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

Glider Building Instructions

Step 1: Cut out the following sized pieces of foamboard

Begin by using your ruler to measure out the following sized rectangles onto your pieces of foamboard and cut them out using any piece of foamboard that could fit the dimensions:

Table 2 - List of rectangular glider pieces and their dimensions

Glider Parts List		
Part:	Quantity:	Dimensions (mm):
Wing (Lower Surface)	1	800 x 100
Wing (Upper Surface)	1	800 x 50
Fuselage	1	750 x 120
Horizontal Stabilizer	1	300 x 100
Vertical Stabilizer	1	150 x 80

These are individual, rectangular pieces that will be modified in the following steps to create the glider. The control surfaces will later be slotted into the stabilizers and wing in order to create the appropriate shape.

Step 2: Cut out the control surfaces

Once you have all the pieces cut out, cut out the following slots in your wing, vertical, and horizontal stabilizer so that you can place your control surfaces. These will just be single straight-line cuts so that you can form the control surfaces on the back end of the wings and stabilizers.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

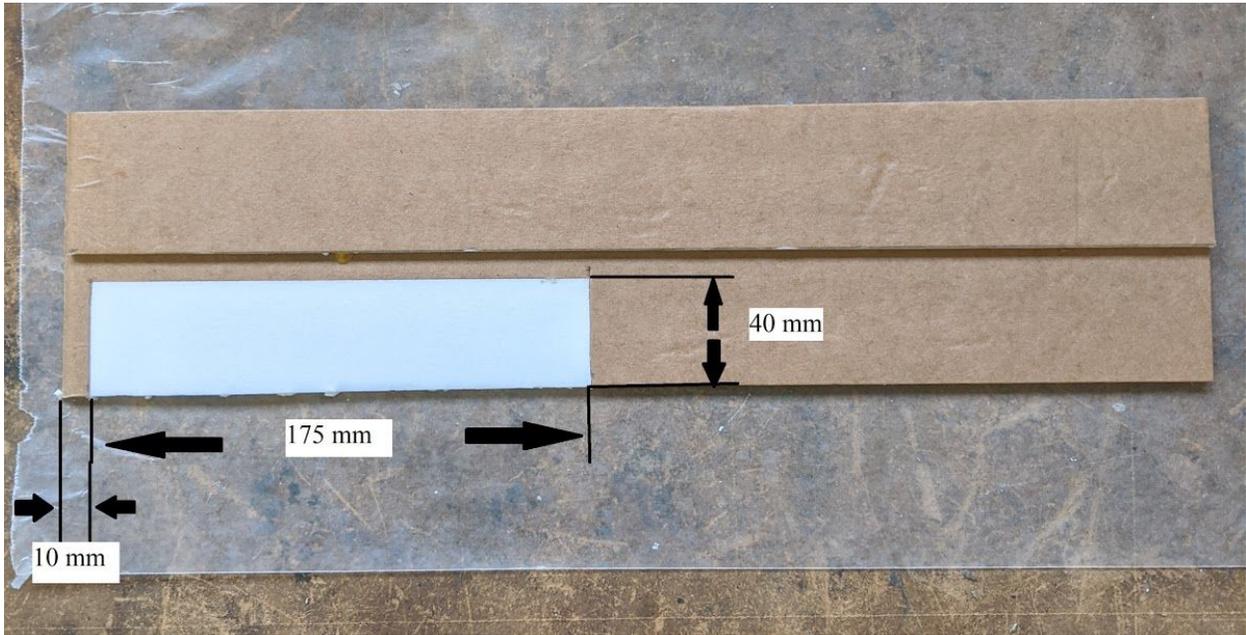


Figure 2 - Control Surface Cut Dimensions (Wing)

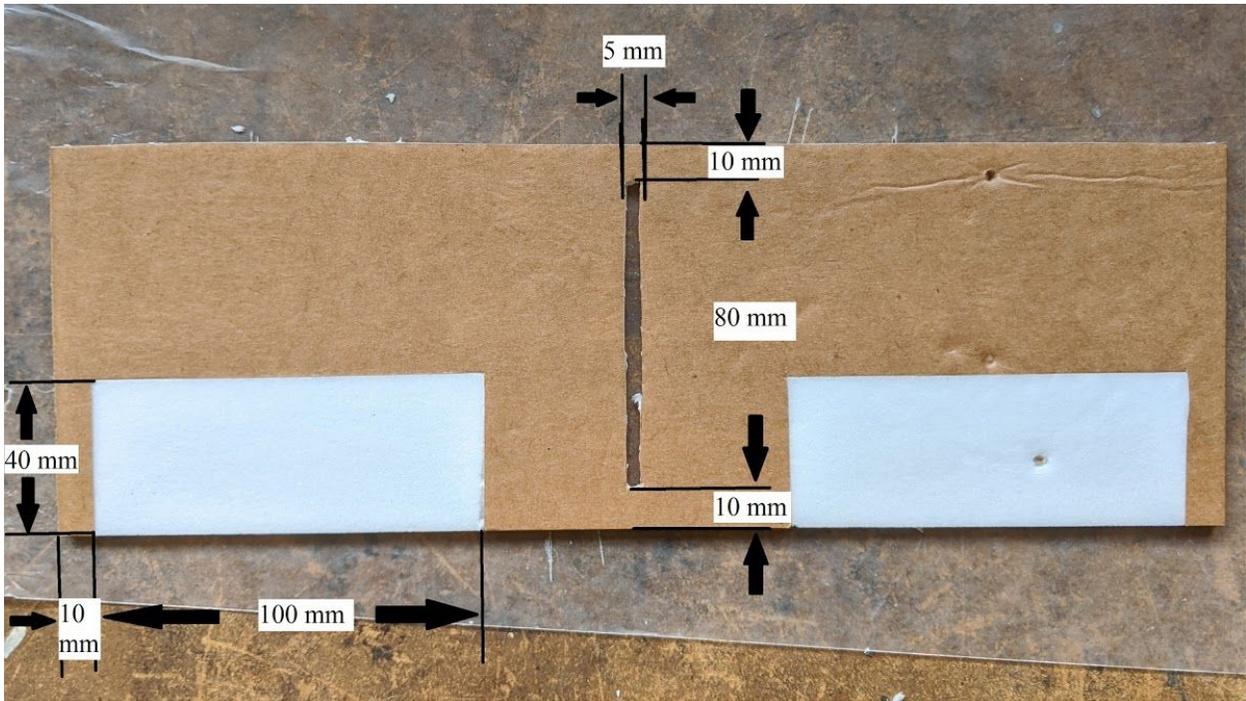


Figure 3 - Control Surface Cut Dimensions (Horizontal Stabilizer)

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

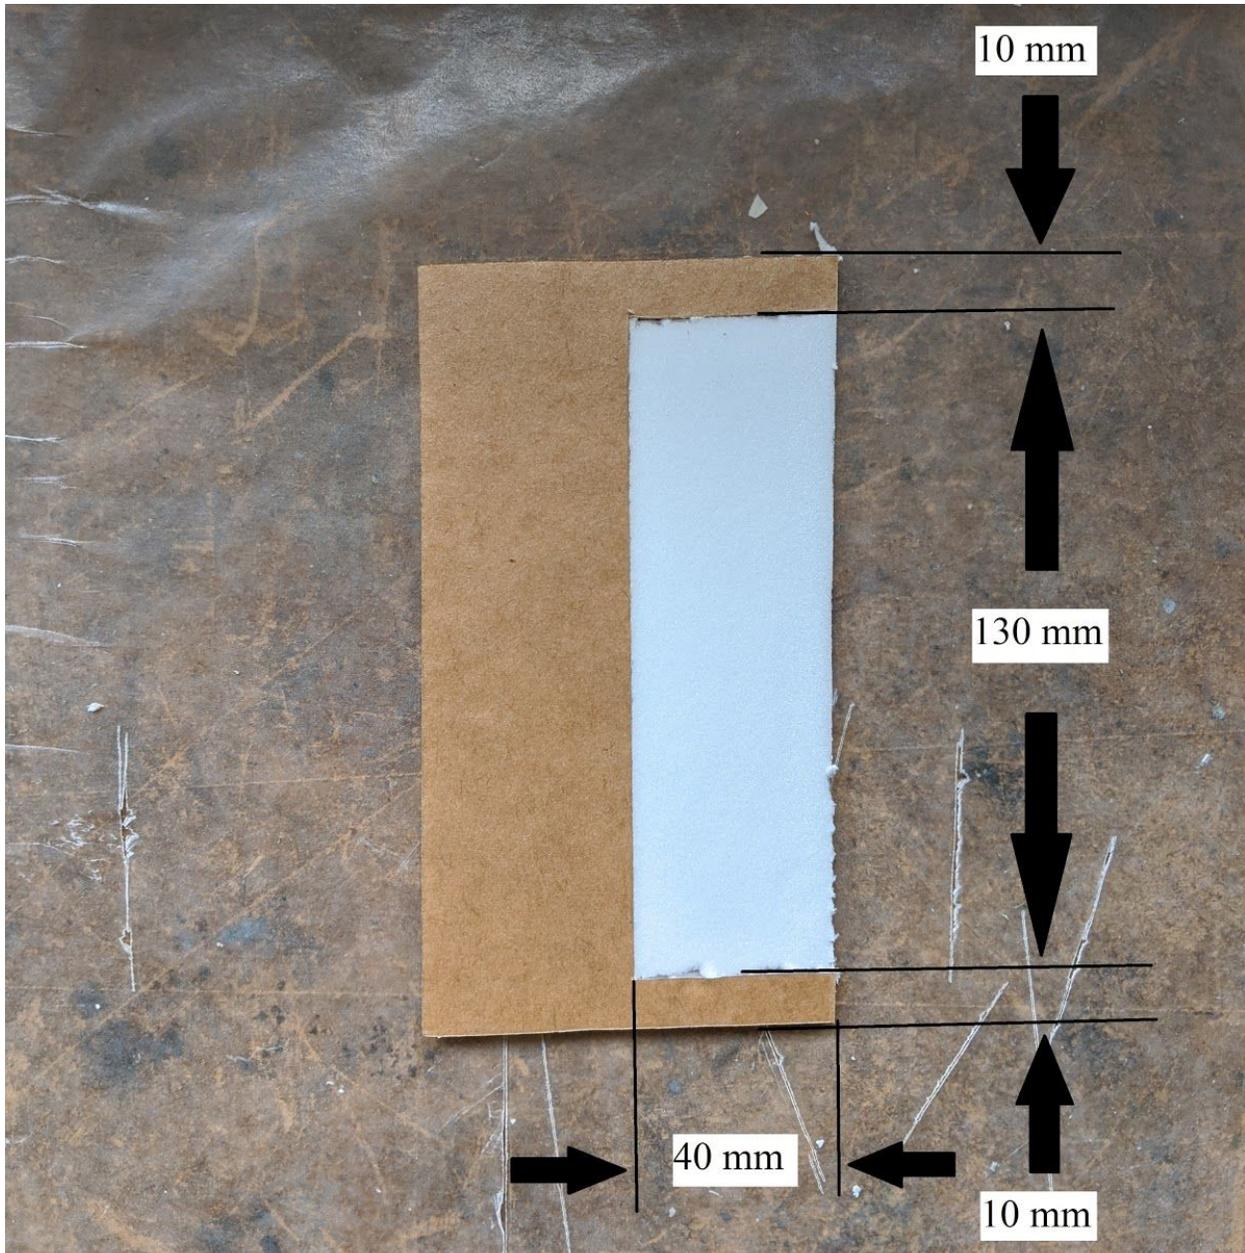


Figure 4 - Control Surface Cut Dimensions (Vertical Stabilizer)

These cuts will allow you to form your control surfaces so that you can control the flight of your glider. The control surfaces that you will be adding to the wing and stabilizers are meant to be reversible in order that both a deflection upward and downward can be created with them. Simply flip the aircraft, and thus the control surface, over so that you can start applying pressure to it in the opposite direction. Remember to be very careful when applying pressure.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission



Figure 5 - Wing with aileron deflected

Step 3: Folding and taping the fuselage together

Here you will divide your fuselage into thirds, lengthwise, and fold into a triangular prism to create the fuselage of your glider. Now, with foamboard this can be tricky, so very carefully, along the two creases to form the triangle, perform 2 45 cuts along the length of each crease so that the foamboard can bend upwards more naturally. Bending the two sides up and together like you can see in Figure 6, tape diagonally along the entire length of the fuselage to fully enwrap it and create the fuselage structure.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission



Figure 6 - Folding and Taping Fuselage

Step 4: Putting everything together

You will now begin to glue all of the pieces together to create your gliders. First begin by gluing the upper surface of the wing to the lower surface. Make sure that the upper surface is flush with the leading edge of the lower surface. You can look at Figure 7 for reference of how the two wing parts should fit together.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission



Figure 7 - Wing Shape

The reason the wing looks like this is twofold. It first adds needed structural support to the wing since it has such a large aspect ratio. This will keep the wings from bending upwards too greatly during flight. Next, this actually will create a very simple type of airfoil known as the KFM-2 that has good performance in the low Reynolds Number flight envelopes such as the glider will see. Figure 8 shows a list of the most common KFM airfoils and you can see where the KFM-2 lies on the chart. The reason the KFM-2 variation was used instead of another one was because the average thickness of foamboard will create a wing thickness equal to approximately 10% whereas all other variations would either take more work to create instead of gluing two pieces of foamboard together or they would be too thick if three or more pieces were glued together.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

KFm Family of Airfoils

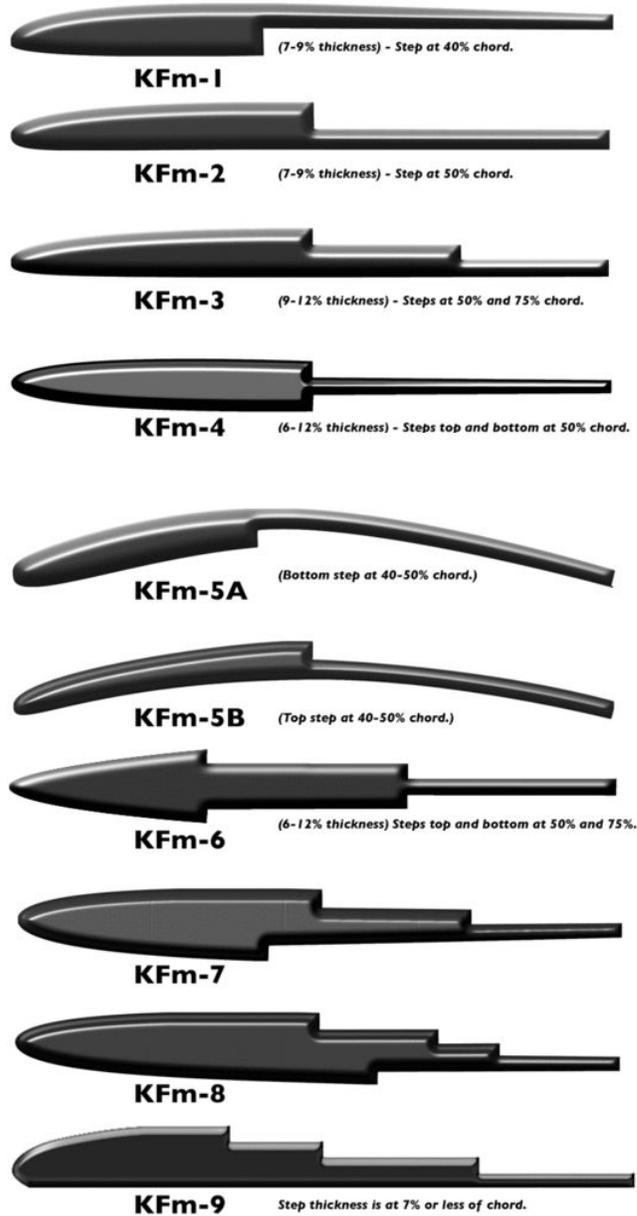


Figure 8 - Chart of KF Airfoils

After the wing has been created, see Figure 9 to locate the areas that the wing and stabilizers should attach to the fuselage. You will again just use your glue to attach the wings and stabilizers, making sure to keep them as centered as possible.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

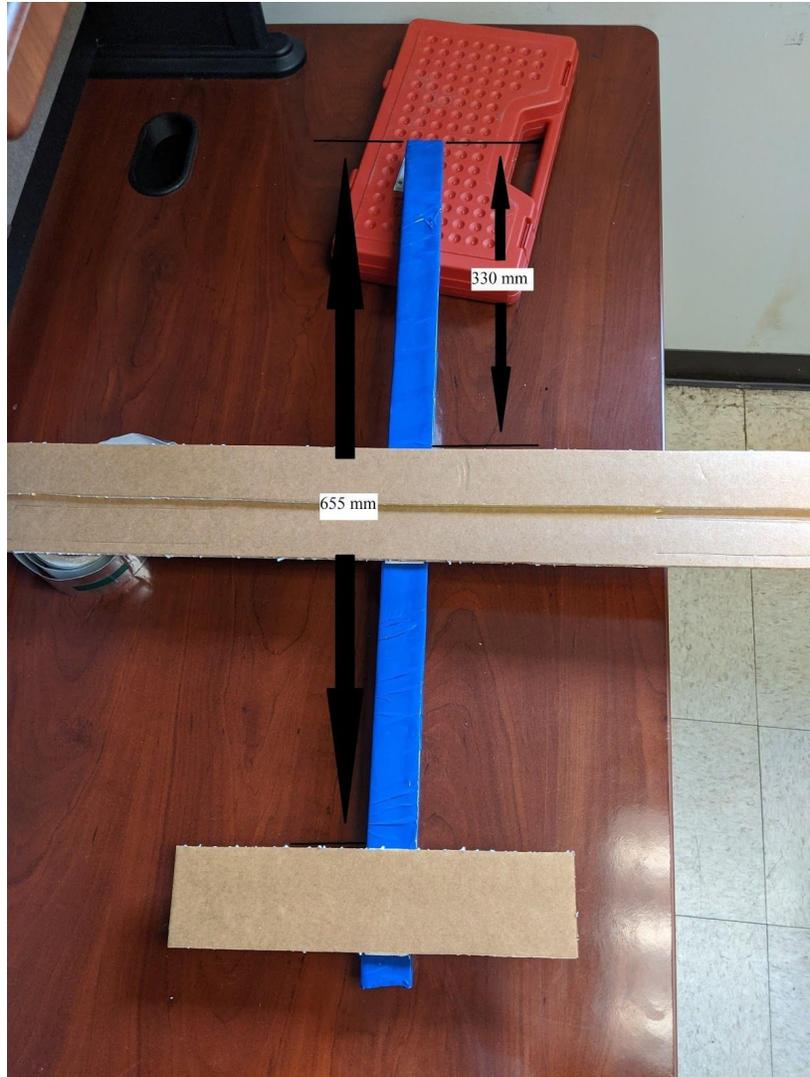


Figure 9 - Fuselage Wing and Stabilizer Placement

Begin by gluing the wing to the fuselage in the same place as the picture above. It might help to flip the fuselage and wing over so that the wing is laying flat on the table with the fuselage being securely pressed on top while the glue dries.

Next, you should carefully slot the vertical stabilizer into the horizontal and glue to create the empennage. See Figure 10 for reference. Ensure that the control surfaces on both the horizontal and vertical stabilizer are facing the same direction and that the empennage is facing forward. Wait until the empennage is fully dried before attempting to glue to the fuselage.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

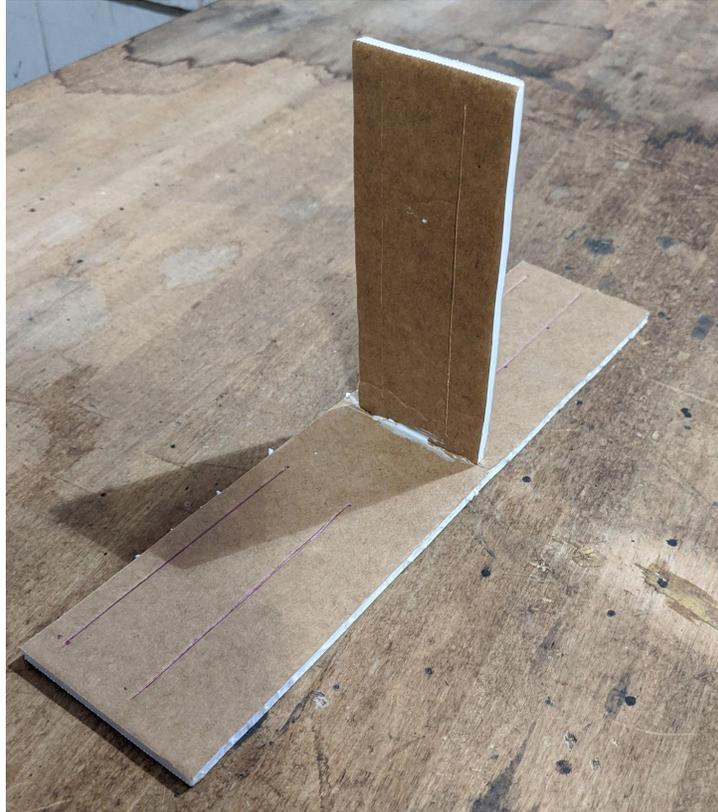


Figure 10 - Vertical stabilizer slotted into the horizontal stabilizer to make the empennage

Finally, glue the empennage to the fuselage in the same spot as shown in Figure 9. Again make sure that the control surfaces of the empennage are oriented in the same direction as those on the wings, i.e. farthest away from the nose. Ensure that the vertical and horizontal stabilizers remain perpendicular while drying and that the whole empennage is not twisted relative to the fuselage.

Step 5: Trimming and CG adjustment.

Once the glider has finished drying, you will find that the Center of Gravity (CG) of the aircraft is too far behind the Center of Pressure (CP) of the wing. When you toss your gliders, they tend to lean back and stall very quickly. To correct this, add more mass to the front of the aircraft until its CG is located at approximately 40% of the chord length from the leading edge (LE) of the wing. This should make the aircraft fly much more stable than you observed earlier.

In order to check whether or not an aircraft's CG is at 40% chord, hold up the aircraft by both wingtips with your two index fingers and slide them down the width of the wing tip until the front and back of the aircraft are both level. Once this position is slightly in front of the midway point of the wing, your aircraft should be stable in flight. It will take some adjustment to make the gliders fly optimally.

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

Glider Control Surface Introduction

After successfully learning how to trim your aircraft, it's now time to identify each of them and understand what exactly those control surfaces do. The control surfaces on the wings are known as ailerons, the ones on the horizontal stabilizers are called elevators, and the one on the vertical stabilizer is a rudder. They all work on the same principle as one another, but because of their orientation, location, and movements, they make the aircraft move differently than the others.

Looking below at Figure 11, observe the difference between a deflected control surface and one that's not. When a right-side up airfoil is deflected downwards, the camber of the airfoil is effectively increased which also makes the airfoil effectively "see" a higher angle of attack therefore increasing lift. When the control surface is deflected upwards, the opposite effect occurs and the airfoil will lose lift.

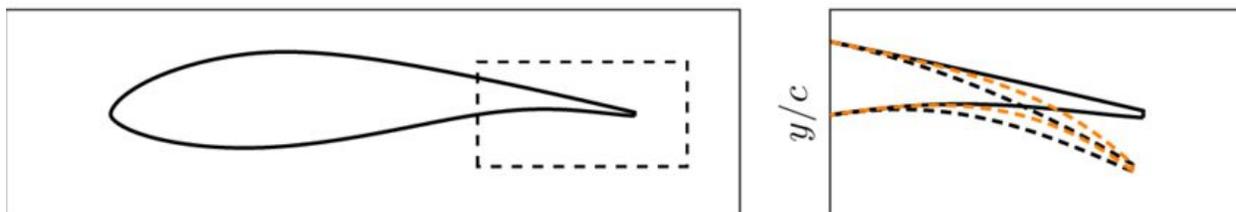


Figure 11 - Image highlighting control surface deflection

The ailerons on the wings will always move opposite of one another, i.e. meaning that if the right one is deflected upwards, the left one will deflect down and vice versa. The ailerons are responsible for controlling the rolling action of an aircraft as one wing begins to produce more lift and the other produces less.

If you wanted to roll an aircraft to the right, how would the ailerons be oriented on each wing?

The rudder on the vertical stabilizer works by producing more lift either one way or the other, so when looking down an aircraft from the back, if the rudder is deflected to the left, the nose of the aircraft will also point left and vice versa.

The elevators on the horizontal stabilizers will always work in tandem with both either deflecting upwards or downwards. The thing about the horizontal stabilizers and elevators is that they are actually designed to produce lift downwards! Referencing Figure 12, you'll be able to tell why the tail actually needs to produce downforce in order for the aircraft to fly straight and level. So when the control surface is deflected upwards, the horizontals will produce more downforce sending the nose of the aircraft up and vice versa. The exact reasoning for why both aerodynamic forces are located behind the CG will be explained in the lecture after today's lab, but keep this in mind and see if you can figure it out beforehand!

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

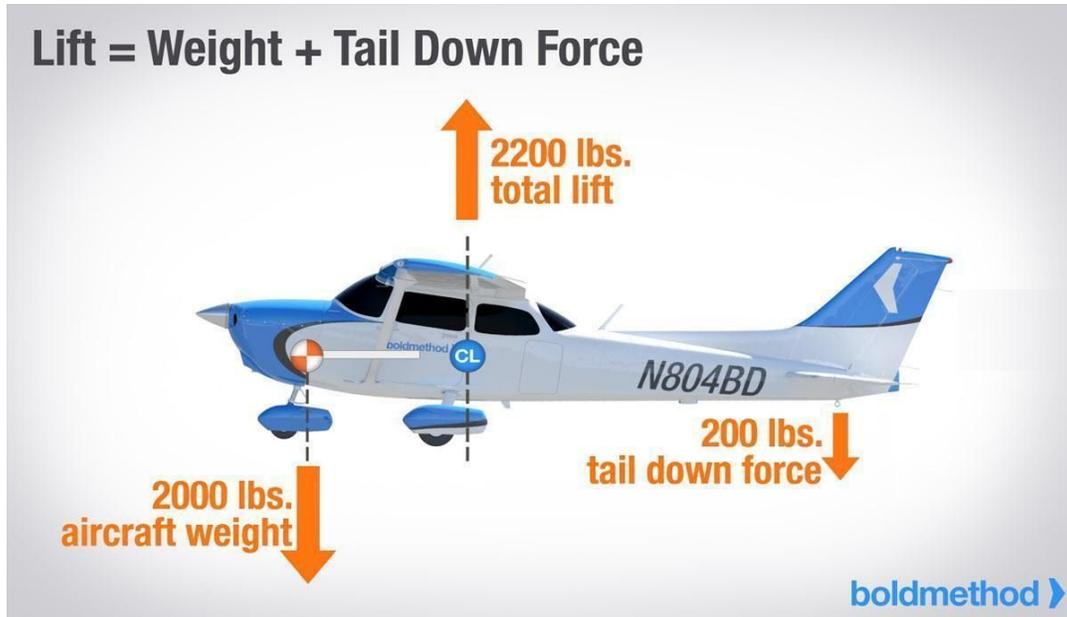


Figure 12 – Force balance diagram to highlight tail downforce

Table 3 can be used as a quick reference guide for how to move the control surfaces to achieve the desired aircraft movements!

Table 3 - Aircraft maneuvers and the corresponding control surface deflections

Control Surface Cheat Sheet	
Aircraft Maneuver	Control Surface Deflections
Roll Right	Right aileron up, left aileron down
Roll Left	Right aileron down, left aileron up
Yaw Right	Rudder right
Yaw Left	Rudder left
Pitch Up	Elevator Up
Pitch Down	Elevator Down

Glider Control Activity

Now, with your glider build completed, it's time to predict and observe the aircraft's movements by adjusting the control surfaces in the same fashion shown above.

Try to make your aircraft perform the following maneuvers by adjusting the control surfaces.

1. Roll right

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission

- 2. Roll left**
- 3. Pitch up**
- 4. Pitch down**
- 5. Yaw right**
- 6. Yaw left**
- 7. Roll right AND pitch up**
- 8. Yaw right AND roll right**
- 9. Yaw left AND pitch down**
- 10. Roll left AND pitch down**

How did these go? Were you able to successfully complete all of the maneuvers? While the aircraft was clearly stuck in the maneuvers that your control surfaces dictated, hopefully you can see now how being able to control these control surfaces during flight would allow an aircraft to move any way it wants!

This laboratory activity to be used as a component of the African Drone and Data Academy Remotely Piloted Aircraft Technology Course – other use not authorized without permission